


MIROS WAVEFUSION®

THE UNIQUE DUAL SENSOR FOR MEASURING DIRECTIONAL WAVE SPECTRA

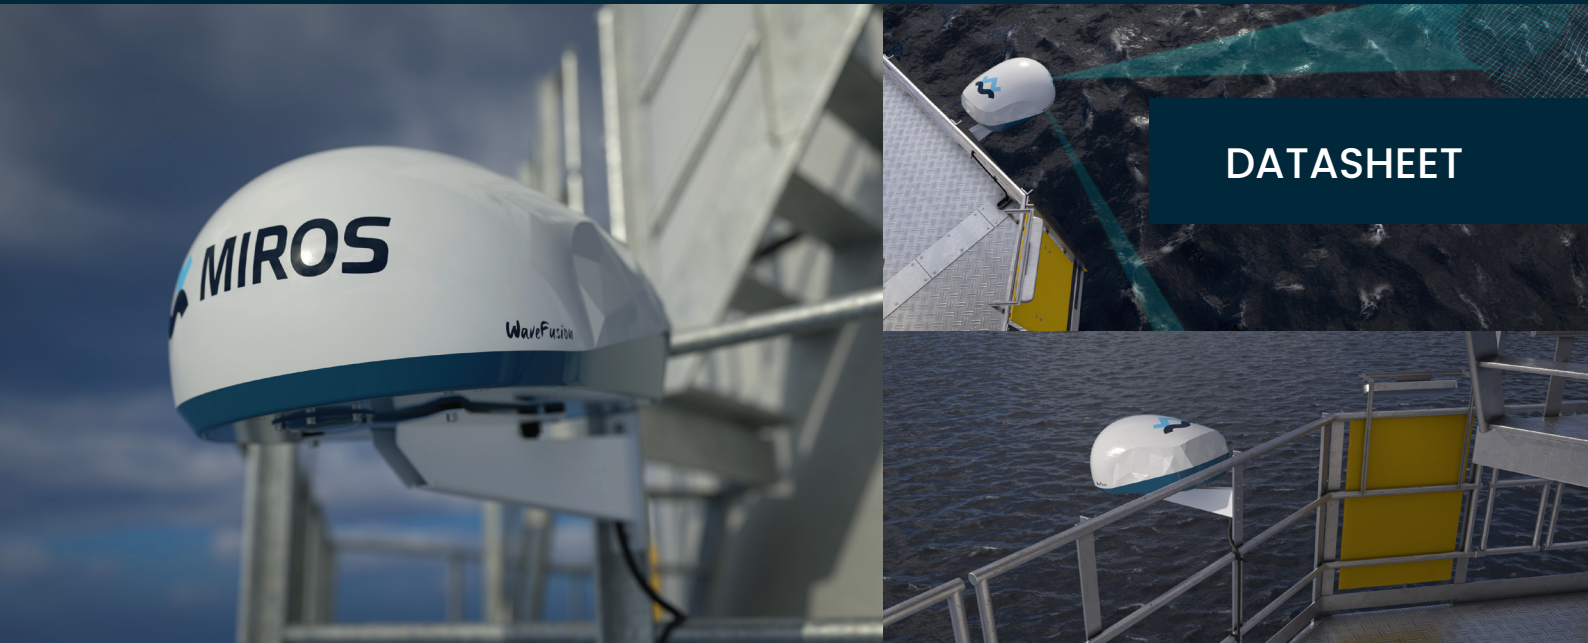

DATASHEET

WaveFusion® is the first of the new next-generation wave radar series by MiroS. The directional wave radar provides more visibility and insights over the sea state in all-weather critical maritime operations including shallow waters. The sensor accurately measures data in real-time by utilizing up to 13 sample areas which are at different distances from the turbine.

Combining the footprints, complemented by smart processing algorithms enables new levels of data performance, reliability and redundancy providing a better understanding of the sea state not impacted by the shadowing effect created by the structure.

Real-time wave measurements for end-to-end visibility.

Improve performance and drive operational efficiency with real-time knowledge of the sea state. IoT-enabled WaveFusion can be complemented with MiroS Cloud for easy and secure access to the data as well as extra services such as data feed connections or device management.


Together with MiroS Cloud users get access to data simultaneously, allowing for a shared situational awareness supporting decision-making in real-time as conditions develop.

KEY FEATURES

- Easy data access, locally or remotely.
- Directional wave spectra & water level.
- Combined footprint measurement.
- Not impacted by fog, rain, or mist.
- No parts submerged in water.
- Embedded data processing.

KEY BENEFITS

- Real-time directional wave measurement in all water depths.
- Enhance the directional wave radar with the water level.
- Widens weather windows access.
- Decrease operational costs.
- Ease installation with light & compact sensor.
- Remote upgrades and configuration.

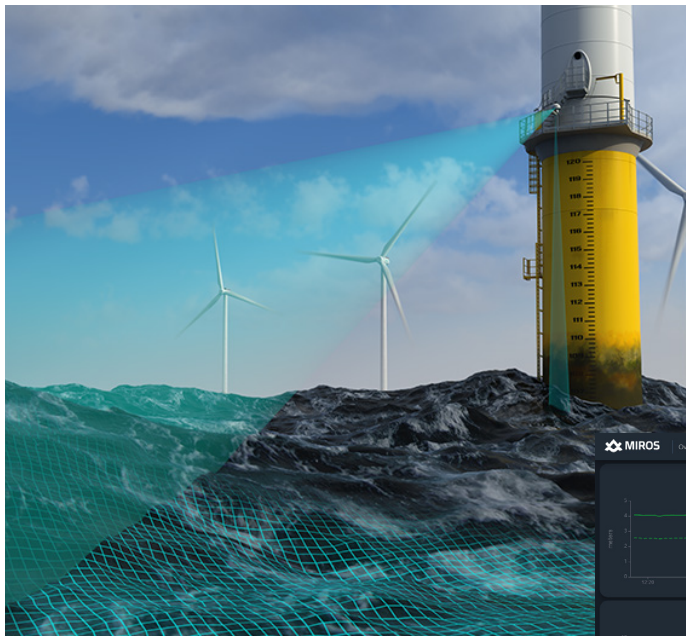

WaveFusion data dashboard.



SPECIFICATIONS

Data	Range	Resolution	Accuracy
Directional spectra:	1-360°	1°	+/- 7°
Wave height:	0-1 m	1 cm	< 5 cm
Wave period:	1-32 s	0.01 s	+/- 5%
Range:	1-35 m	1 mm	< 5 mm


Physical interface
Standard interface: CAT5e STP

Displays/GUIs
Data, status, configuration: Web GUI

Integration options
Local: NMEA (proprietary formats)
Remote: JSON & CSV formats from Miros Cloud

Electrical Data
Frequency of operation: Dual: 5.8 Ghz pulse & 60-64 GHz (sweep)
Bandwidth: 20 MHz (pulse)
Transmitted power: 275 mW average /10 W peak
Supply Voltage: 100-264 VAC, 50/60Hz
Power consumption: < 50 W (average)¹
EMC/RED 2014/30/EU and RED 2014/53/EU

Environmental Specifications
Temperature: 0° to + 40°
Humidity: 0-95 % RH
Ingress Protection: IP X6

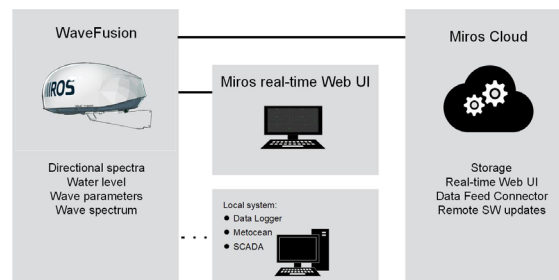

Versions
WaveFusion/01/F: for fixed installations
WaveFusion/01/M: for floating installations

Physical Specifications
Installation height: 15-35 m
Dimensions (H x W x D): 323 x 710 x 505 mm
Weight (kg): 20 kg

Accessories
101907: Mounting bracket
101908: Junction box
101914: Junction box, 4G Modem & Antenna
Cloud services: Contact Miros for details

Notes
1. Power consumption including the Motion Reference unit.

Specifications are subject to change without prior notice.